TECHNOLOGY TO THE POINT



Haitian Plastics Machinery Group Co., Ltd No.1688, Haitian Road, Xiaogang, Beilun, Ningbo, Zhejiang, China 315801 + 86-574-8617 7005 (China) + 86-574-8617 7242 (International) haitian@mail.haitian.com www.haitianpm.com

NINGBO HAITIAN HUAYUAN MACHINERY CO., LTD. No.1, Nanhuan Road, Export Processing Zone, Beilun, Ningbo, Zhejiang, China 315806 +86-574-8617 7242 +86-574-8622 1864 haitian@mail.haitian.com www.haitianpm.com




MARS SERIES

SERVO-HYDRAULIC SOLUTION 600 - 12,000 kN







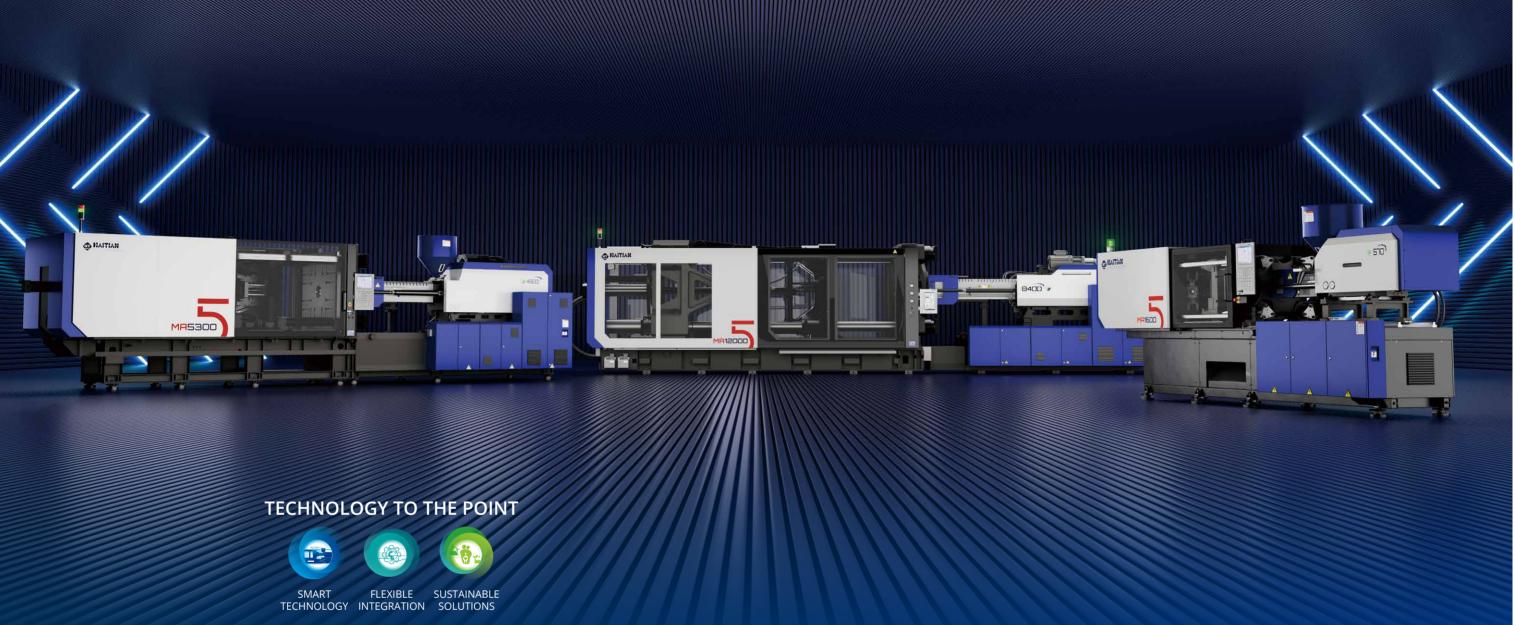



Ľ

ក

Ε

S

Opening up the future of the fifth generation

Continuous optimization of quality and efficiency, new digital intelligence and the development of sustainable solutions are important keys of future-oriented plastics machinery industry. Haitian International works tirelessly to meet customers' needs by continuously improving its core technology platform and driving innovation at the highest level. The fifth generation creates a new intelligent manufacturing format that enables injection molding machines, mold-, application and one-stop solutions and once again sets the benchmark for the injection molding machine industry.

Smart Technology

In the modern technological landscape, smartness not only stands for the edge, but also for success. At "Haitian smart & intelligent products", we have continuously evolved to give mechanical hardware "a soul engine" through digital intelligence platforms. Al algorithms and sensor technology enable intelligent optimization of production processes and provide self-awareness, self-adaptation, self-decision-making and self-reconfiguration of smart equipment. Our new fifth machine generation sets new standards. With a clear focus on smart innovation and enablement, we strive to minimize operating costs and maximize production efficiency. Our vision: Shaping a smart future together with our customers.

Flexible Integration

Ð

Q

×

J

ш

Our intelligent injection molding machines are equipped with flexible and open integration functions. Open interfaces support efficient connection with peripheral devices, automation units, etc. With the upstream and downstream data of the industrial value chain, an integrative production ecosystem is created that generates extensive information benefits for the plastics processor. From plant status and production plan to process control and quality traceability to full life cycle management incl. energy consumption, decision analysis, etc., the result is an integrated production ecosystem.

Sustainable Solutions

As an industry leader, Haitian International Haitian International focuses its research and development efforts on fulfilling social responsibility, protecting the environment, and conserving and utilizing resources. We continue to develop energy-saving and consumption-reducing technologies, promote the upgrade and iteration of energy-saving drives, reduce the carbon footprint of equipment, and provide technological innovation and efficient solutions for the use of degradable and recyclable materials. We remain customer-focused with application-driven solutions made by Haitian. Technology to the point for economic and environmental benefits and a future fit for next ¬¬generations.

MA 5 SERVO-HYDRAULIC SOLUTIONS

Energy-saving, efficient, intelligent

Relying on the fifth generation technology and inheriting the excellent genes of the world's best-selling servo hydraulic energy-saving injection molding technology, MA5 was launched. The full range of performance breakthroughs and advancements, from injection to plastification and mold clamping structures, are optimized and improved in every aspect. The hardware configuration continues to evolve and bring new appearance upgrades, setting industry benchmarks for performance and quality, and easily coping with future

technical challenges. At the same time, it is equipped with multiple smart technologies, which can fully meet customers' personalized and flexible production requirements while improving efficiency. The newly upgraded electric charging device, combined with the latest energy-saving technology and information technology, makes the injection molding process more energy-saving and efficient, creating a new intelligent injection molding ecology.

HT Clamp

The self-learning and self-correcting algorithm adjusts position tolerances and the positioning of the mold opening quickly and precisely.

High-rigidity platen

Press center platen structure design reduces mold cavity size deformation and improves product molding accuracy.

HT Energy

Refined energy consumption monitoring and auxiliary management.

Upgraded plasticizing unit The plasticizing performance has been

greatly improved, and the wear resistance of plasticized parts has doubled.

HT Lubricate

Neural network algorithm and precise lubrication model, intelligent optimized lubrication control, selfoptimizing lubrication parameters.

HT Control

New large-screen control panel and new UI design make the interactive experience more user-friendly.

tribution box components.



Electrical charging

The plasticizing speed and quality are improved, while the energy efficiency of the entire machine is comprehensively improved (optional for models with an injection value of 10600 and above).



High protection level dis-

extends the service life of

High-response servo system


Tailor-made servo power system, high-speed response, dynamic sensitivity, and surging power.


MA 5 **CLAMPING UNIT**




High-rigidity platen structure

The fixed platen and clamping rear platen structures are optimized to increase rigidity and reduce deformation.





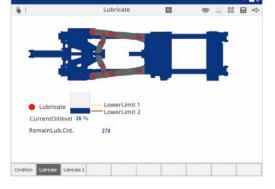

490 48


HT Lubricate

Based on extensive industry experience, the digital lubrication model uses a neural network to dynamically regulate the ideal amount of lubrication.

HT Clamp

520 515

> Self-learning and self-correction algorithm corrects position deviation, accurate mold opening and positioning, and provides a stable and fast movements.

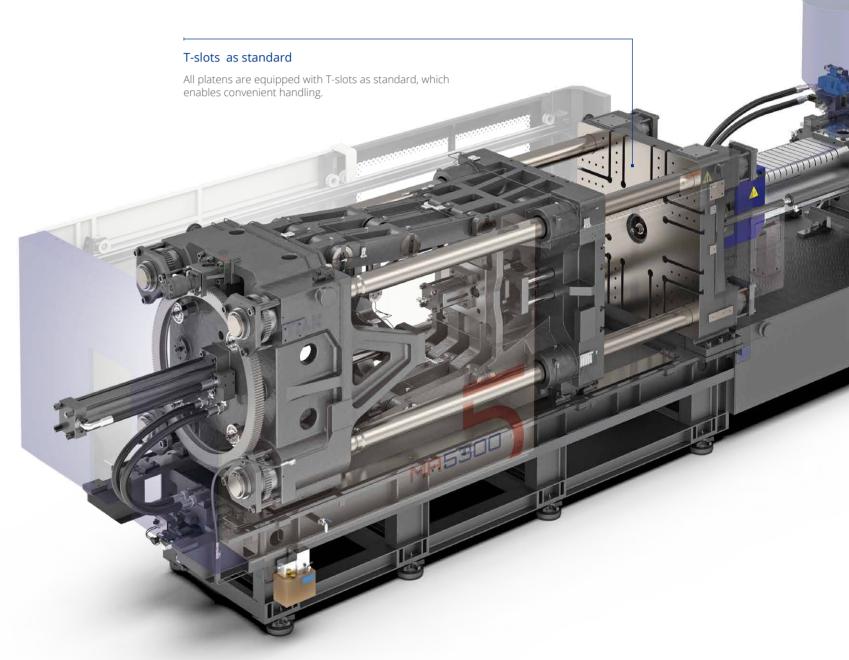

MA 5 **INJECTION UNIT**

Repeatability of product quality (tested with 4700kN model)

Part Weight (831 830 829

828 827 826

825

824

823

The new barrel cooling device

to improve the stability of plasticizing.

Adopts the latest designed barrel cooling structure



Frequency

For precise injection movement, fast response, repeatability in injection, good low speed stability and good product consistency. It improves the performance of the equipment and the adaptability of the process.

The double-layer linear guide supports Low friction coefficient, small injection inertia

and high injection accuracy.






Electrical charging The new electric pre-molding not only improves the plasticizing The plasticized parts have been comprehensively upgraded, and speed and quality, but also improves the energy efficiency of the whole machine.



Energy-saving insulation device

cover structure and a detachable energy-saving insulation structure design, which effectively improves the heating and insulation effect.

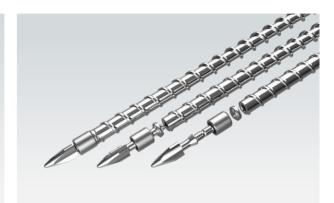

Overall upgrade of plastification unit

the plasticizing performance has been greatly improved. The wear resistance of the plasticized parts has doubled, and the service life has been extended.



Non-welding power pipelines

The energy-saving insulation device adopts a double-layer barrel The non-welding process of power pipelines reduces the risk of oil leakage, improves the cleanliness of pipelines, and extends the service life of hydraulic components.

MA 5 **POWER SYSTEMS**

The fifth generation dedicated servo power system for injection molding machines

Haitian continues to be committed to the field of servo drive and control systems. A long and vast application experience makes it possible for us to develop a new generation of servo drive systems equipped with high performance servo drives and the latest high speed gear pumps from Japan Sumitomo. The result: efficient and energy-saving, high performance, quiet and stable operation.

Ultra-high dynamic response

Easily matches customers' needs for high-speed and high-response equipment and expands the scope of product processes.

Ultra-low speed and high stability

Adopt dynamic differential compensation technology to completely solve the internal leakage problem of the gear pump and easily meet customer requirements for ultra-low speed and high stability.



Fifth generation injection molding machine dedicated tailor made servo motor

MA 5 **CONTROL SYSTEM**

6,000 kN and below models

- \odot 12.1-inch TFT LCD display, 800x600 resolution, part of the display program is independently controlled by Cortex A8 processor
- O Partitioned full-function keyboard, including page navigation, data entry, operating mode, status transition and action buttons
- © Series online help interface functions, OR code link online help function
- Multi-language online switching, complete multi-language text display







7,000 kN and above models

- operation

- button input
- © Series of online help interface functions, QR code link online help function ◎ Can support PDF, 3D view file display

- O New screen collection function, quickly locate commonly used screens O Multi-language online switching , perfect multi-language text display



The fifth-generation dedicated servo drive for injection molding machines

Fully digital bus control system with high dynamics and high responsiveness.




Latest high speed gear pump for injection molding from Sumitomo Japan

The new QS pump has ultra-high stability and greatly improves work efficiency.



◎ 15.6-inch touch screen, vertical layout, richer human-computer interaction information, more reasonable partitions, and more friendly multi-touch

- ◎ Standard RFID user identification card reader
- ◎ Standard 4 groups of 8 online configurable add-ons buttons
- ◎ Standard configuration of 16 channels of extended programmable

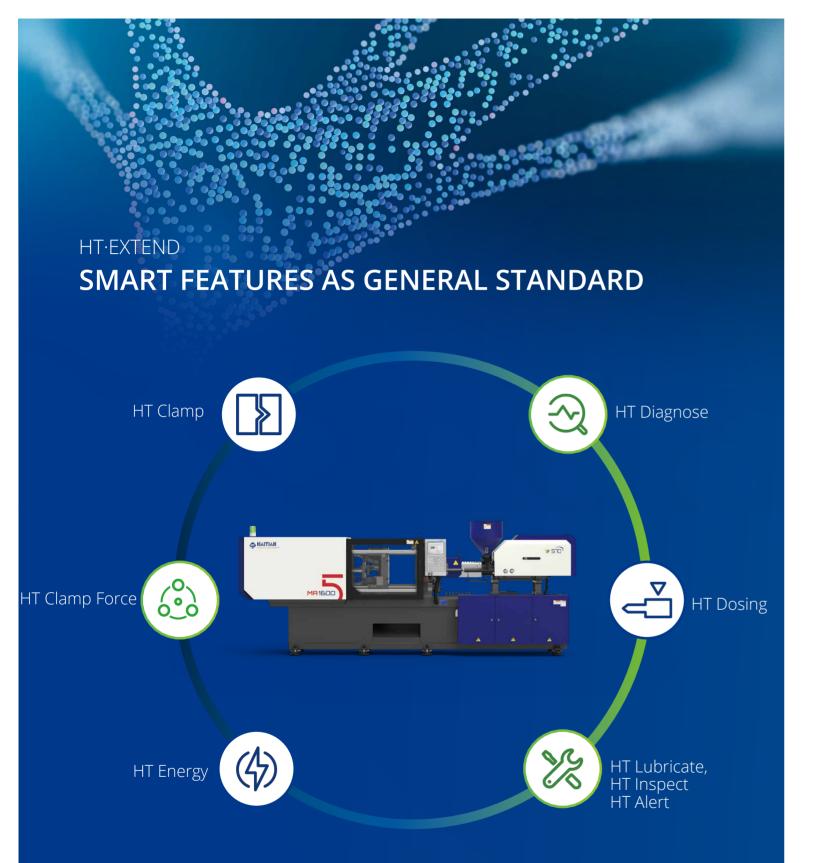

Mars has never been more process-optimized. The intelligent functions we have developed are "in line" with the development of our entire series. For example, HT Energy, in which we have dispensed with conventional sensor technology and instead implied a mathematical model. This solution was also developed

in-house, in close cooperation with other Haitian divisions, and is available to users as standard equipment, at no extra cost. Because our principle still applies: We want to give our customers the greatest possible competitive advantages without imposing additional costs on them.



HT Clamp

Self-learning and self-correction algorithm adjusts position deviation, accurates mold opening and positioning, and stables and fast movement.

	Clamp-For	ce	W.F.	4	P 11 88	* 1
ClmpForce Auto Adj					HiPresTime	
						00 s
ClmpTons	0				LoPresTime	
Process:						00 s
Select "Cimpforce Au	to Adj"					
1					Act.Time	-
Clamping force sett	ing.				0.	00 s
					Clmp.Posn.	
Double click "Mold Adjus	ting					0.0 mm
Button"	ung				OpenTime	
1					0.	00 s
Open/close safety door to press "Cycle Start Butto					ClampForce	
press cycle start butto					clamprorce	0 ton
						0 101
"Quick Auto Adjusting" r					Cls.Time	100
Note: The clamping force selected to appropriate va					0.	00 s
matically when the function	in is				OpnEndposi	
activated.						0.0 mm
Press [.] to select					_	
Home 👩 Cimp 👩 Fun	1		1	-		🗊 Ba


HT Clamp

The intelligent clamping force system model algorithm simulates the actual and real clamping force. Setting and display is in standard.

		🌲 🛔 8	2023-06-06 15:21:07
•	Energy-Energy1	U.	• * * •
Energy Ratio	Heate 0 % Drive 0 %	Total Power EnergyTotal HeatEnergy	3600.000 kW 16040.000 kWh
Energy Ratio	Auto 1% Manua 99%	StandbyEnergy DriveEnergy	16040.000 kWh
Energy Calendar (kWh)	Auto – Manua	Mass Per Mold ProdCount	0.0 g 0
0 0 0 0 0 0 0 0 12.25 12.26 12.27 12.28 1		EnergyPerMass ResetTime 0000-00-00 00:00	0.000 kWh/kg
•Data In This Page No Home DEne1 DEne2	t Measured, For Refer	ence Only, Min: 0.0	Max: 1000000.0

HT Energy

Standard with refined monitoring of energy consumption, auxiliary management, statistics and analysis of energy consumption distribution in the production process. Provides decision-making basis for the energy optimization strategies in your manufacturing.

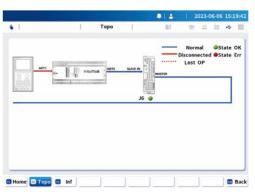

HT Diagnose

The graphical digital bus topology provides information on the status of the most important control units, thus helping the operator for maintenance to quickly locate faulty nodes and determine the cause of the fault.

• 1-		1	Lubricator	E.	105	······································	88 🔶 I
Lub. Patch 34		Lubr	icate	Lubri	cate#2	Lubrie	ate#3
		30000Bef	30000Aft	10000Bef	10000Aft	10000Bef	10000Aft
ub. Count		1000 1500	3000 3000	15	30	2500	20000
RemainLub.Cnt.		-170		15		2500	
ub. Alarm Time		30.00	250.00	60.00	60.00	60.00	60.00
ub. Hold Time		10.00	250.00	10.00	10.00	10.00	10.00
ub. Start Time		0.00	0.00	30.00	30.00	0.00	0.00
ub. Active Cnt.		1	1	2	2	1	1
actory Lub.		100	Fctry.Lub				
Min: 1 May		500					

HT Lubricate

Digital lubrication model, combined with neural network control, dynamically matches the optimal lubrication amount.

a	1	mart Charge	1 8 8	2023-06-06 15:15:
• ·				
Smart Charge	oUse ~			Shot Count
StartCount	5	Starting State	•	Cycle Time
Password		SamrtChargeRatio	0.000	0.00 s
MinSpd.ofSma.Cha.	100	SmartChar.Deviat.	1.00	Act.Time 0.00 s
				Inj.Posn.
				Chg.Torq.Out
				Chg.RPM Out
		peed will be optimize		MotorTorque 0 %
when the function of activated under con	f smart cha dition of ch	rge is on. The optimiz arging time less than	zation will be cooling time.	ChrgRPM 0 rpr
Press [.] to selec	:t			
Home 🛛 Func 🗊				🗇 Ba

HT Dosing

Charging speed adaptive control optimize energy consumption and reduce mechanism wear.


1	Energy-Energy2	Ш.	₩ ± 23 ↔ I
Last Action Energy(kV	/h)	Last 10 Cycle Ener	gy(kWh)
Mold Cls.	0.0000	1	0.000
Mold Opn	0.0000	2	0.000
noid opn	0.0000	3	0.000
Inject	0.0000	4	0.000
Hold	0.0000	5	0.000
Hold	0.0000	6	0.000
Charge	0.0000	7	0.000
SuckBack	0.0000	8	0.000
JUCKDBCK	0.0000	9	0.000
Ejector	0.0000	10	0.000

Driver1: HI StaWord 000	T	po-Information	U I	 23 🐟
RealSpd	00000 0 RPM			
	0 % 0 V 0.0 °C 0.0 °C			
Dri.Bypa. NoUse				

MA 5 FLEXIBLE INTEGRATION

MA5 is equipped with flexible open integration functions, and the entire series is equipped with "Go Factory 2.0" digital intelligent management software, which can best meet customers' one-stop demands for automated and digitally intelligent production.

In addition, it can be compatible with the latest international general interfaces according to needs. Customers can freely choose automation integration equipment and MES partners to realize interactive connections between multi-device and multi-platform systems with injection molding machines as the core, and enjoy open integration.

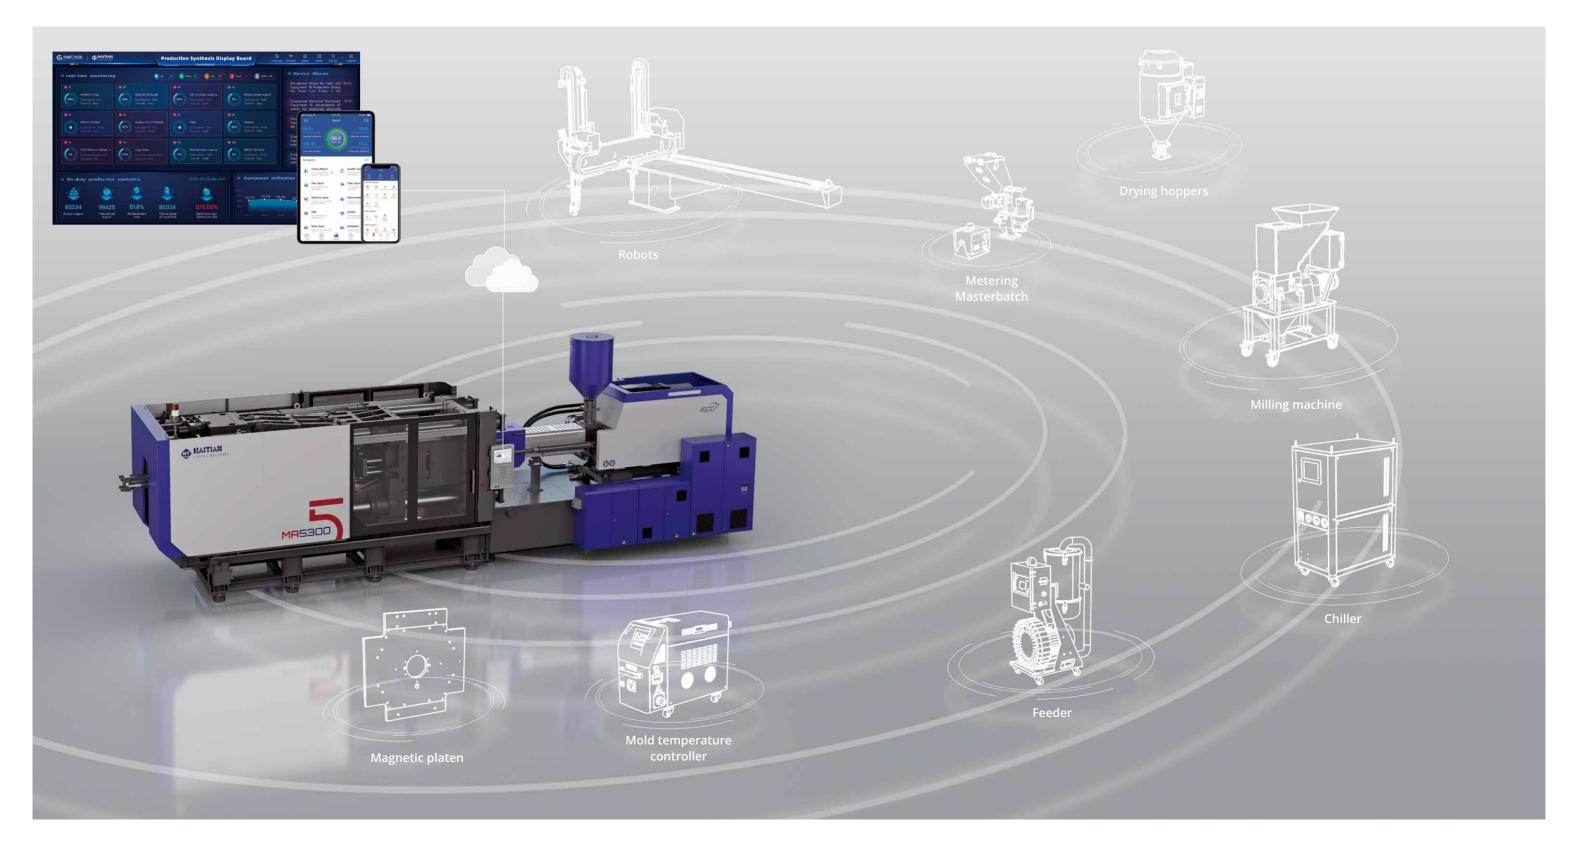

MA 5 CONFIGURATION

Injection unit

- Single-cylinder injection system for models of 2500kN and below.
- Dual-cylinder injection system for models of 2800kN and above
- Nozzle centering fine adjustment device
- ESG injection function (4700kN and below models)
- Linear guide rail for injection and carriage
- Electrical charging device (12000kN and below)
- Energy-saving insulation cover for barrel (12000kN and below models)
- Barrel heating temperature closed-loop control (applicable to both K-type and J-type)
- Screw cold start prevention function
- Injection curve monitoring function, memory function
- Injection fully closed-loop function
- HT Dosing function
- V/P switching (position, time, pressure OPT)
- Three seating and withdrawal methods (after material charging, before mold opening, after injection)
- Back pressure control of charging proportion
- Automatic purging function
- Secondary charging function
- Servo control hydraulic system
- Oil temperature detection and alarm function
- Bypass filtration system (2500kN and below models)
- Independent filtration system (2800kN and above) models)
- Removable oil suction and oil filter device (2500kN and above models)
- Energy-saving control of oil cooling water valve
- HT Energy

Clamping unit


- Three-plate clamping unit
- Low pressure mold protection
- High rigid moving platen supports sliding feet
- Ejector rod inverted structure
- Standard with Haitian standard T-slot + threaded hole template

- Robot mounting threaded hole interface (EUROMAP 18)
- Automatic mold adjustment function
- HT Clamp
- HT Lubricate
- HT Clamp Force
- Electrical and hydraulic double chain insurance
- Adjustable back and top stroke
- Three hydraulic ejection methods (vibration, holding, multiple times)
- Ejection delay function
- Controllable ejector program[]2 paragraph ejection[]
- Optional moving/fix platen hydraulic core
- Free core function
- Optional moving/fix platen cooling water interface

Optional features


- The clamping unit matches the size of the injection unit
- Charging during mold opening
- O Electrical charging (injection volumn 10600 and above models)
- O Hydraulic (pneumatic) nozzle
- Injection servo closed-loop control
- O Injection direction proportional control
- Proportional control of mold opening and closing direction
- Closed-loop temperature control at feed opening
- O Mold hot runner control
- O Pneumatic cores
- Function of multiple-set cores
- Glass tube flow meter
- Valve gate (pneumatic/hydraulic)
- O Robot electrical and mechanical interface
- O Magnetic template electrical interface
- OPC DA/OPC UA data interface
- Mold positioning ring
- Tie bar extraction function
- O Hydraulic clamp
- Side automation equipmen
- Integrated energy-saving dryer
- Conveyor belt

MA 5 **OPTIONAL FEATURES**

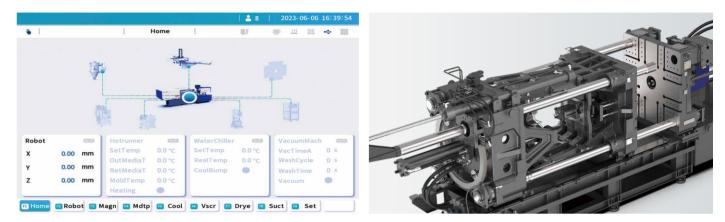

HT Smart peripherals

Machines can be equiped with smart peripherals to realize the side This device facilitates mold installation and removal, which is flexible automation. with different mold types, and has a small footprint in terms of height.

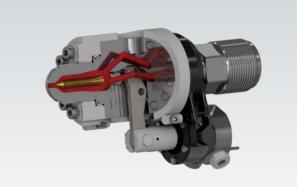

Hydraulic nozzle

For uniform plastic distribution and filling during the injection molding For a fast and high-precision mold opening and closing. process to enhance quality.



Glass tube flow meter

For simple and intuitive display of the cooling water level; the flow and pressure of the cooling water can be adjusted to actual needs.

• Standard Optional

Tie bar extraction function



Proportional control



Extended interfaces

For e.g. hot runners, cores, sequence valve and others.

MR 5 EXAMPLES FOR FIELDS OF APPLICATION



Automobile industry

The automotive sector is versatile and the industry is growing rapidly. Our approach: cost-efficient system solutions for flexible and fully automated smart production lines.

Appliance industry

The consumer goods market is the mass market for plastic products par excellence and is more competitive than any other. Standard applications in production – albeit with sometimes high quality requirements.





Consumer electronics industry

Our everyday life is rich in technical systems such as cell phones, tablets, computers or memory cards and connectors. New slim designs, new surfaces and innovative functions and short product cycles requires competitive solutions.

Logistics industry

The large dimensions and volumes of the parts quickly shift the focus to material consumption and processing. This requires well thought-out, cost efficient manufacturing solutions if you want to survive in the face of tough competition.



HAITIAN WORLDWIDE



Overseas Management Center

6 Regional Headquarters Manufacturing Center 9 Application & Experience Center



- Overseas Management Center
- Regional Headquarters
- Manufacturing Center
- Application & Experience Center